

WATER PUMP WP 230



Displacement (cc)	40.2
Power Output (kW/hp)	1.55/2.1
Weight (kg)	8
Conveying Height (m)	50
Conveying Capacity (l/min)	250

Portability

- Robust support frame
- Support frame enables installation site independent of position

Performance

- High vertical and horizontal pumping capacity

High-quality equipment

- Suction basket fitted as standard
- Hose clips and flange 1.5"

Benefits

- Can be placed on all surfaces
- Up to 250 l/min=15 m³/h at up to 8 m discharge head and 27 m pump height
- Suction basket protects the tool against ingestion of small parts and the high-quality clips allow hose installation

Displacement (cc)	40.2
Power Output (kW/hp)	1.55/2.1
Weight (kg)	13
Volume Flow Rate (liter/mm)	12.2
Working Pressure (bar)	5-40

PORTABLE SPRAYER SG 230



Portability

- Large range
- Robust support frame
- Flexible 30 m spray hose

Performance

- Large spray range
- High volume flow rate

High-quality equipment

- Suction unit (suction hose, suction basket, return hose) provided as standard
- Spray lance available as add-on STIHL accessory
- 30 m spray hose available as add-on STIHL accessory

Benefits

- Easy to reach isolated plants
- Can be placed on all surfaces
- 2,800 m² area to be covered without moving the tool
- Reaching high planted areas
- Covering different applications
- Ensuring water spray quality
- Accurate spray pattern

MISTBLOWERS



Multi application Spraying

- Spraying
- Dusting
- Blowing



SR 420

Displacement (cc)	Container Capacity (l)	Horizontal Spraying Range	Weight (Kg)
56.5 cm³	13 liters	12 meter	11.1 Kg



SR 5600

Displacement (cc)	Container Capacity (l)	Horizontal Spraying Range	Weight (Kg)
56.5 cm³	13 liters	12 meter	11.2 Kg



SR 450

Displacement (cc)	Container Capacity (l)	Horizontal Spraying Range	Weight (Kg)
63.3 cm³	14 liters	14.5 meter	12.8 Kg



Easy conversion into dusting and spraying

कृषि उपकरण, लाए परिवर्तन



ANDREAS STIHL PVT. LTD.

Gut No. 53/01, Pune-Nashik Highway,
Kuruli, Tal. - Khed, Dist. Pune 410 501, India.
Tel. : +91 2135 616 700

Dealer Address

German Technology and Innovation



www.stihl.in

info@stihlindia.com

Follow us on

BRUSHCUTTER FS 230 / FR 230



Portability

- Robust, durable, reliable
- Handle frame fold
- Easy to clean
- Master level control

Performance

- Large capacity fuel tank
- Multiple blade attachments

High-quality equipment

- Additional fan housing cover to minimise dust
- Professional Engine Crankcase design
- Ergonomic handle design

Benefits

- Easy to transport
- Comfort for user
- Cost effective
- Proven STIHL quality
- High performance
- Less maintenance
- Fatigue - less ergonomic design



FS 120

Displacement	Power output	Weight
30.8cm ³	1.3Kw/1.8hp	6.3kg*


FS 250

Displacement	Power output	Weight
40.2cm ³	1.6Kw/2.2hp	6.3kg*

FS 55

Displacement	Power output	Weight
27.2cm ³	0.75Kw/1hp	5.0kg*

	FS230	FR230
Displacement (cc)	40.2	40.2
Horse Power (Kw/hp)	1.5/2.1	1.5/2.1
Power to weight ratio (kg/kW)	4.83	6.77
Dry weight (without attachment) (Kg)	7.5	10.5
Max. torque (Nm/rpm)	1.9 / 6000	1.9 / 6000

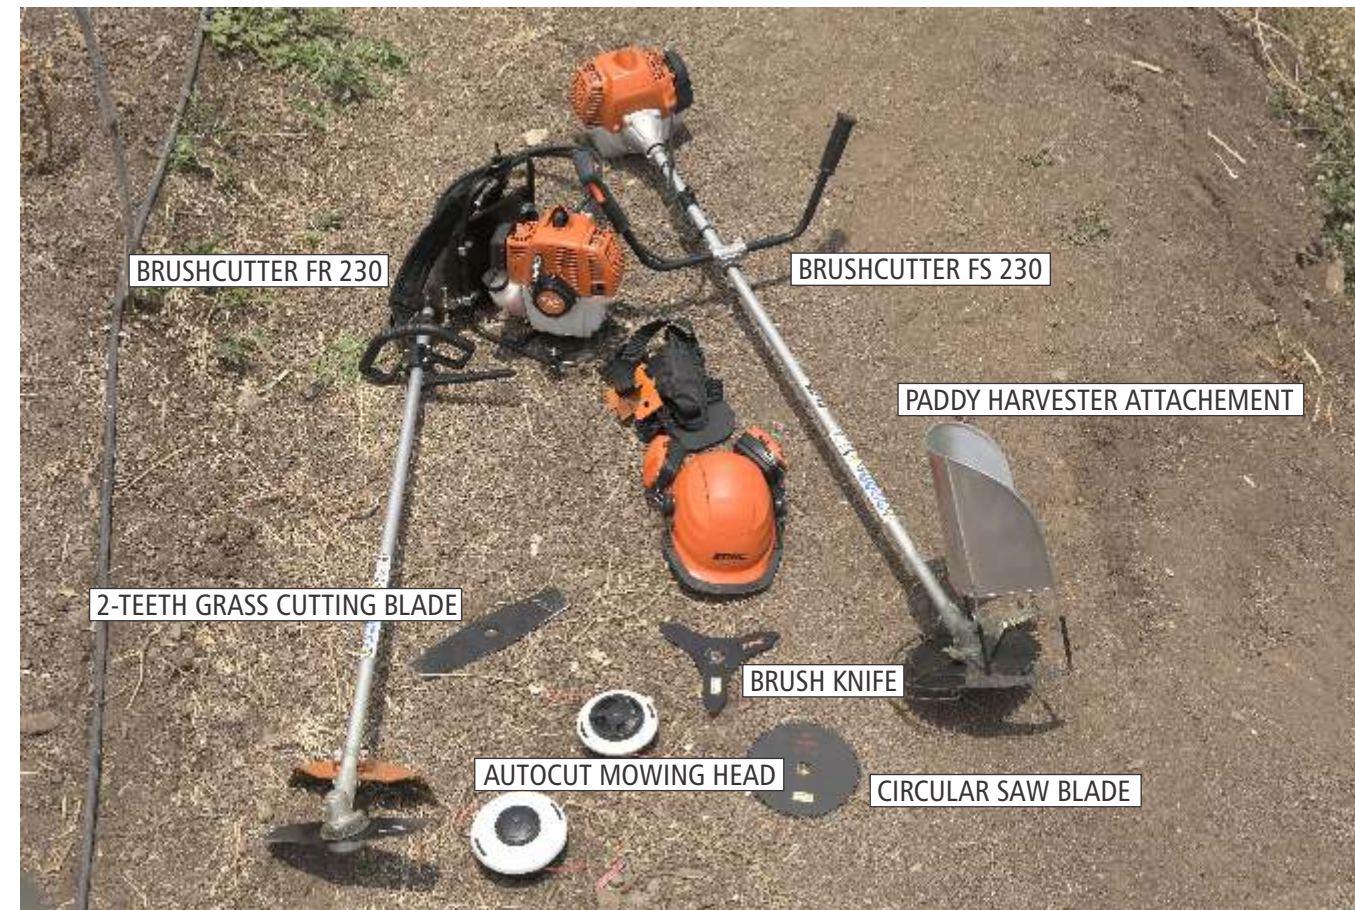

EARTH AUGER BT 230



Displacement (cc)	40.2
Power Output (kw/hp)	1.55/2.1
Weight without drill (kg)	6
Max.Torque (Nm/ RPM)	1.9 / 6000
Drill Diameter (mm)	150, 200, 300

Portability

- Very compact dimensions without auger fitted
- Robust support frame

Performance

- Drilling of holes up to 12" possible

High-quality equipment

- Market-standard 20.0 mm auger connection
- Adapter to allow use of STIHL Auger range available

Benefits

- Easy to carry and transport
- Engine unit protected on all sides
- A wide range of market-standard augers can be mounted to the 20.0 mm standard connection

Features:

- Compact dimensions
- Robust support frame
- Large holes can be drilled
- Market-standard auger connection

Displacement (cc)	40.2
Power Output (kW/hp)	1.55/2.1
Cultivation Width (cm)	25
Cultivation Depth (mm/ inch)	75 / 3"
Weight (kg)	20

Portability

- Robust support frame
- Handle frame fold
- Handles protected when placing tool down

Performance

- Long-life cultivator blades
- 250 mm(10")cultivator blades

High-quality equipment

- Options to add weight
- Options for transport
- Ergonomic handle design

Benefits

- Stable, no matter how hard the ground is.
- For easy transport
- Handles do not get dirty when tool is placed down
- Proven STIHL quality
- For optimum performance (other sizes can be fitted)
- Designed for ergonomic working position without tiring
- Transport and carrying options provided

INTERCULTIVATOR BC 230

